


279.00 EUR
incl. 19% VAT, plus [shipping](#)

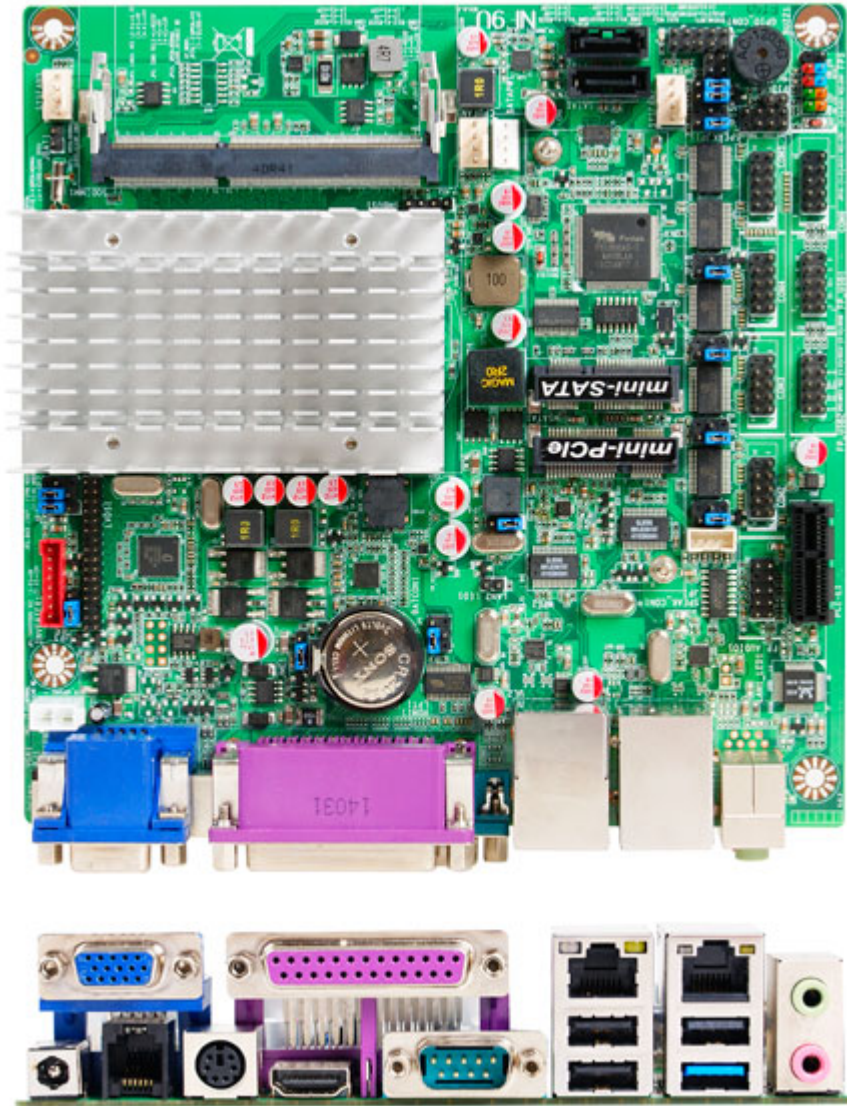

- Intel® Baytrail-M/D/I Processor
- Integrated Intel® Gen7 Intel® Graphics DX 11*, OGL3.0
- Supports Single Channel DDR3L 1333/1066 MHz,
- 1 x SO-DIMM, up to 8GB system memory
- 1 x RJ11 port, 1 x parallel port
- 1 x VGA, 1 x HDMI, 1 x Dual Channel 24-bit LVDS
- 1 x USB 3.0, 7 x USB 2.0, 2 x SATAII
- 1 x mini-PCIe, 1 x PCIe x1 slot
- Gigabit LAN : 2 x LAN
- Support CPU Over-Temperature protection
- Support CPU Over-Current/Under Voltage protection
- Support DRAM Over-Current/Under Voltage protection
- Support CPU Smart Fan
- Support DC Fan

| | |
|-------------------------|---------------------------------|
| Form Factor | |
| Dimensions | Mini-ITX (170 x 170mm) |
| Processor System | |
| CPU | Intel® Baytrail-M/D/I Processor |
| Core Number | (By CPU) |

| | |
|---------------------------|---|
| Max Speed | - (By CPU) |
| L2 Cache | - (By CPU) |
| Chipset | - N/A |
| BIOS | - AMI 64Mb Flash ROM |
| Expansion Slot | |
| PCI | - 0 |
| Mini-PCIe | - 1 (Half size) |
| mSATA | - 1 |
| PCIe | - 1 |
| CFast Card Socket | - 0 |
| CF Card Socket | - 0 |
| Memory | |
| Technology | - 1 * Single Channel DDR3L 1333/1066 MHz SDRAM |
| Max. | - 8GB |
| Socket | - 1 * SO-DIMM |
| Graphics | |
| Controller | - Intel® HD Graphics |
| VRAM | - Shared Memory |
| VGA | - 1 (Support max resolution 2048X1536) |
| LVDS | - 1 * Onboard 24-bits dual channel connector (resolution 1920x1080) |
| HDMI | - 1 (resolution1920x1080) |
| DVI-I | - No |
| DisplayPort | - No |
| MultiDisplay | - Yes (Dual Display) |
| Ethernet | |
| Ethernet | - 10/100/1000 Mbps |
| Controller | - GbE LAN: RTL8111G |
| Connector | - 2 * RJ 45 |
| SATA | |
| Max Data Transfer Rate | - 2 * SATAII (3.0Gb/s) |
| Rear I/O | |
| VGA | - 1 |
| DVI-I | - 0 |
| HDMI | - 1 |
| DisplayPort | - 0 |
| Ethernet | - 2 |
| RJ11 | - 1 |
| USB | - 4 (3 * USB 2.0 + 1 * USB3.0) |
| Audio | - 2 (MIC/Line-out) |
| Serial | - 1 (RS-232/422/485 with 5V/12V selectable header) |
| Parallel | - 1 |
| eSATA | - 0 |
| PS2 | - 1 |
| DC-input | - 1 |
| Internal Connector | |
| USB | - 4 (2 * USB 2.0 via 9 pin header) |
| PS2 | - 0 |
| LVDS / inverter | - 1 |
| VGA | - 0 |
| Serial | - 5 (5 x RS-232 with 5V/12V selectable header) |
| SATA | - 2 * SATAII (3.0Gb/s) |
| mPCIe | - 1 |
| Parallel | - 0 |
| mSATA | - 1 |
| CIR | - 0 |

| | |
|---------------------------|--|
| GPIO 8-bit | - 4in / 4 out |
| Chassis intrusion | - 1 (via 2pin header) |
| Audio Header | - 1 |
| Watchdog Timer | |
| Output | - From Super I/O to drag RESETCON# |
| Interval | - 256 segments, 0,1,2...255sec/min |
| Power Requirements | |
| Input PWR | - 9~24V DC-In |
| Power On | AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready |
| Certifications | |
| Certifications | - CE, FCC, RoHS, REACH |
| Environment | |
| Temperature | - Operating: 0■- 60■ |
| | - Storage: -20■- 85■ |