


98.95 EUR

incl. 19% VAT, plus [shipping](#)

- Industrial Arduino IDE !
- Built-in OLED Display !
- Flexible programming !
- 8Mhz CPU !

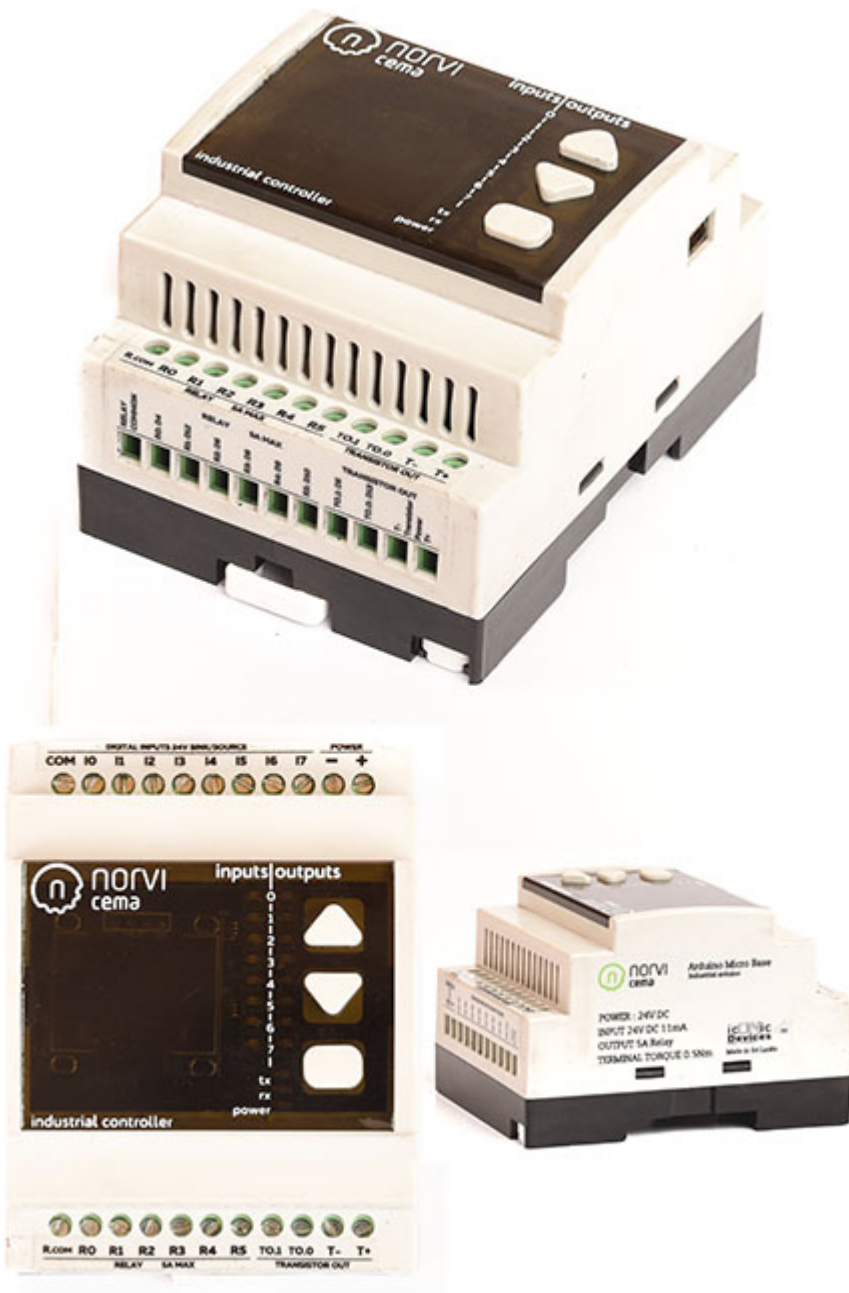

Support:  [Datasheet](#) |  [Brochure](#) |  [Quick Start](#) | [Applications](#)

NORVI Cema Industrial Arduino is the most compact version of NORVI series. Yet it has 8 Outputs and 8 Inputs, beating all the devices of same size on the market. Two transistor outputs of it adds PWM or Pulse output capabilities. It comes with a 6 pin expansion port with Serial output. Cema is leading with reliability in the industrial environments.

- 8x Sink/Source Digital Inputs (24V)
- 6x 5A Relay Outputs
- 2x Open collector Transistor
- Programmable with Arduino IDE
- Integrated OLED and buttons programmable as HMI
- LED indicators for easy diagnosis

|                                       |                                                                                                                                           |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Main</b>                           |                                                                                                                                           |
| Range of product                      | NORVI CEMA                                                                                                                                |
| Product type                          | Programmable Controller                                                                                                                   |
| Rated supply voltage                  | 24V DC                                                                                                                                    |
| Discrete input number                 | 8 discrete input                                                                                                                          |
| Discrete output type                  | Relay and Transistor                                                                                                                      |
| Discrete output number                | 6 Relay outputs,<br>2 Transistor outputs                                                                                                  |
| Discrete output voltage               | 24V DC for transistor output                                                                                                              |
| Discrete output current               | 0.5A with T0.0... T0.1 Transistor 2 A with R0....R5                                                                                       |
| <b>Complementary</b>                  |                                                                                                                                           |
| Discrete IO number                    | 16                                                                                                                                        |
| Number of Expansions                  | -----                                                                                                                                     |
| Supply voltage limits                 | 20.4 ..... 28.8V                                                                                                                          |
| Inrush current                        | ≤ 50A                                                                                                                                     |
| Power consumption in W                | 32.6 ..... 40.4 with all outputs ON                                                                                                       |
| Discrete logic Input                  | Sink or source                                                                                                                            |
| Discrete input Voltage                | 24V DC                                                                                                                                    |
| Voltage TypeVoltage state 1           | > = 15V for Input                                                                                                                         |
| Voltage TypeVoltage state 0           | < = 5V for input                                                                                                                          |
| Discrete Input Current                | 5mA for Input                                                                                                                             |
| Input impedance                       | 4.7k Ohm for Input                                                                                                                        |
| Local signalling                      | 1 LED green for PWR<br>1 LED green for RUN<br>8 LED green for I0.....I7<br>6 LED green for R0.....R5<br>2 LED green for T0....T1          |
| Electrical connection                 | Removable screw terminal block for inputs and outputs (pitch 5.08 mm)                                                                     |
| Mounting support                      | Top hat type TH35-15 rail conforming to IEC 60715<br>Top hat type TH35-7.5 rail conforming to IEC 60715<br>Plate or panel with fixing kit |
| Height                                | 90.50 mm                                                                                                                                  |
| Depth                                 | 56.60 mm                                                                                                                                  |
| Width                                 | 60.60 mm                                                                                                                                  |
| Weight                                | 0.43 kg                                                                                                                                   |
| <b>Environment</b>                    |                                                                                                                                           |
| Resistance to electrostatic discharge | 4kV on contact, 8kV on air                                                                                                                |
| Resistance to electro magnetic fields | 10 V/m (80 MHz ..... 1 GHz)                                                                                                               |
|                                       | 3 V/m (1.4 MHz ..... 2 GHz)                                                                                                               |
|                                       | 1 V/m (2 MHz ..... 3 GHz)                                                                                                                 |
| Immunity to microbreaks               | 10 ms                                                                                                                                     |
| Relative humidity                     | 10....95% without condensation in operation                                                                                               |
| IP degree of protection               | IP20                                                                                                                                      |
| Operating altitude                    | 0...2000m                                                                                                                                 |
| Storage altitude                      | 0...3000m                                                                                                                                 |
| Shock resistance                      | 15 gn for 11 ms                                                                                                                           |
| Resistance to electrostatic discharge | 4kV on contact, 8kV on air                                                                                                                |
| Resistance to electro magnetic fields | 10 V/m (80 MHz ..... 1 GHz)                                                                                                               |
|                                       | 3 V/m (1.4 MHz ..... 2 GHz)                                                                                                               |
|                                       | 1 V/m (2 MHz ..... 3 GHz)                                                                                                                 |